

TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

MODULE NO.: WF70D2SWGGDNG0#

General Specifications

Item	Dimension	Unit
Size	7.0	inch
Dot Matrix	800 x RGBx480(TFT)	dots
Module dimension	181.2(W) x 105.4(H) x 9.8 (MAX)(D)	mm
Active area	152.4 x 91.44	mm
Pixel pitch	0.1905x 0.1905	mm
LCD type	TFT, Normally Black, Transmissive	
View Angle	85/85/85/85	
TFT IC	RM53010+RM57410 or Equivalent	
Aspect Ratio	15:9	
Backlight Type	LED, Normally White	
TFT Interface	18-bit RGB	
PCAP Driver IC	ILI2130 or equivalent	
PCAP Interface	I2C	
PCAP FW Version	0x07.0x00.0x00.0x00.0x70.0x44.0x0A.0x02	
PCAP Resolution	16384*16384	
Touch Panel	With PCAP	
Surface	Glare	

*Color tone slight changed by temperature and driving voltage.

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

1. Operating conditions:

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For LCM	Vcc	—	2.9	3.3	3.6	V
Supply Current For LCM	Icc	Black Pattern	—	85	130	mA
Supply CTP	VDDT		3.1	3.3	3.5	V
	I _{CTP}		—	65	100	mA

2. LED driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit
LED current	—	—	110	—	mA
LED voltage	VLED+	22.4	24.0	25.6	V
LED Life Time	—	50,000	—	—	Hr

Interface

1. LCM PIN Definition

Pin	Symbol	Function
1	GND	Power Ground
2	GND	Power Ground
3	NC	Not Connect
4	Vcc	Power Supply for Digital Circuit
5	Vcc	Power Supply for Digital Circuit
6	Vcc	Power Supply for Digital Circuit
7	Vcc	Power Supply for Digital Circuit
8	NC	Not Connect
9	DE	Data Enable
10	GND	Power Ground
11	GND	Power Ground
12	GND	Power Ground
13	B5	Blue Data 5 (MSB)
14	B4	Blue Data 4
15	B3	Blue Data 3
16	GND	Power Ground
17	B2	Blue Data 2
18	B1	Blue Data 1
19	B0	Blue Data 0 (LSB)
20	GND	Power Ground
21	G5	Green Data 5 (MSB)
22	G4	Green Data 4
23	G3	Green Data 3
24	GND	Power Ground
25	G2	Green Data 2
26	G1	Green Data 1
27	G0	Green Data 0(LSB)
28	GND	Power Ground
29	R5	Red Data 5 (MSB)
30	R4	Red Data 4

31	R3	Red Data 3
32	GND	Power Ground
33	R2	Red Data 2
34	R1	Red Data 1
35	R0	Red Data 0(LSB)
36	GND	Power Ground
37	GND	Power Ground
38	DCLK	Clock Signals ; Latch Data at the Falling Edge (CLK)
39	GND	Power Ground
40	GND	Power Ground


2. Backlight Driving Part

Pin No.	Symbol	Description
1	VLED+	Red, LED_ Anode
2	VLED-	White, LED_ Cathode

3. PCAP PIN Definition

Pin	Symbol	Function
1	VSS	Ground for analog circuit
2	VDDT	Power Supply : +3.3V
3	SCL	I2C clock input
4	NC	No connect
5	SDA	I2C data input and output
6	NC	No connect
7	/RST	External Reset, Low is active
8	NC	No connect
9	/INT	External interrupt to the host
10	VSS	Ground for analog circuit

Contour Drawing

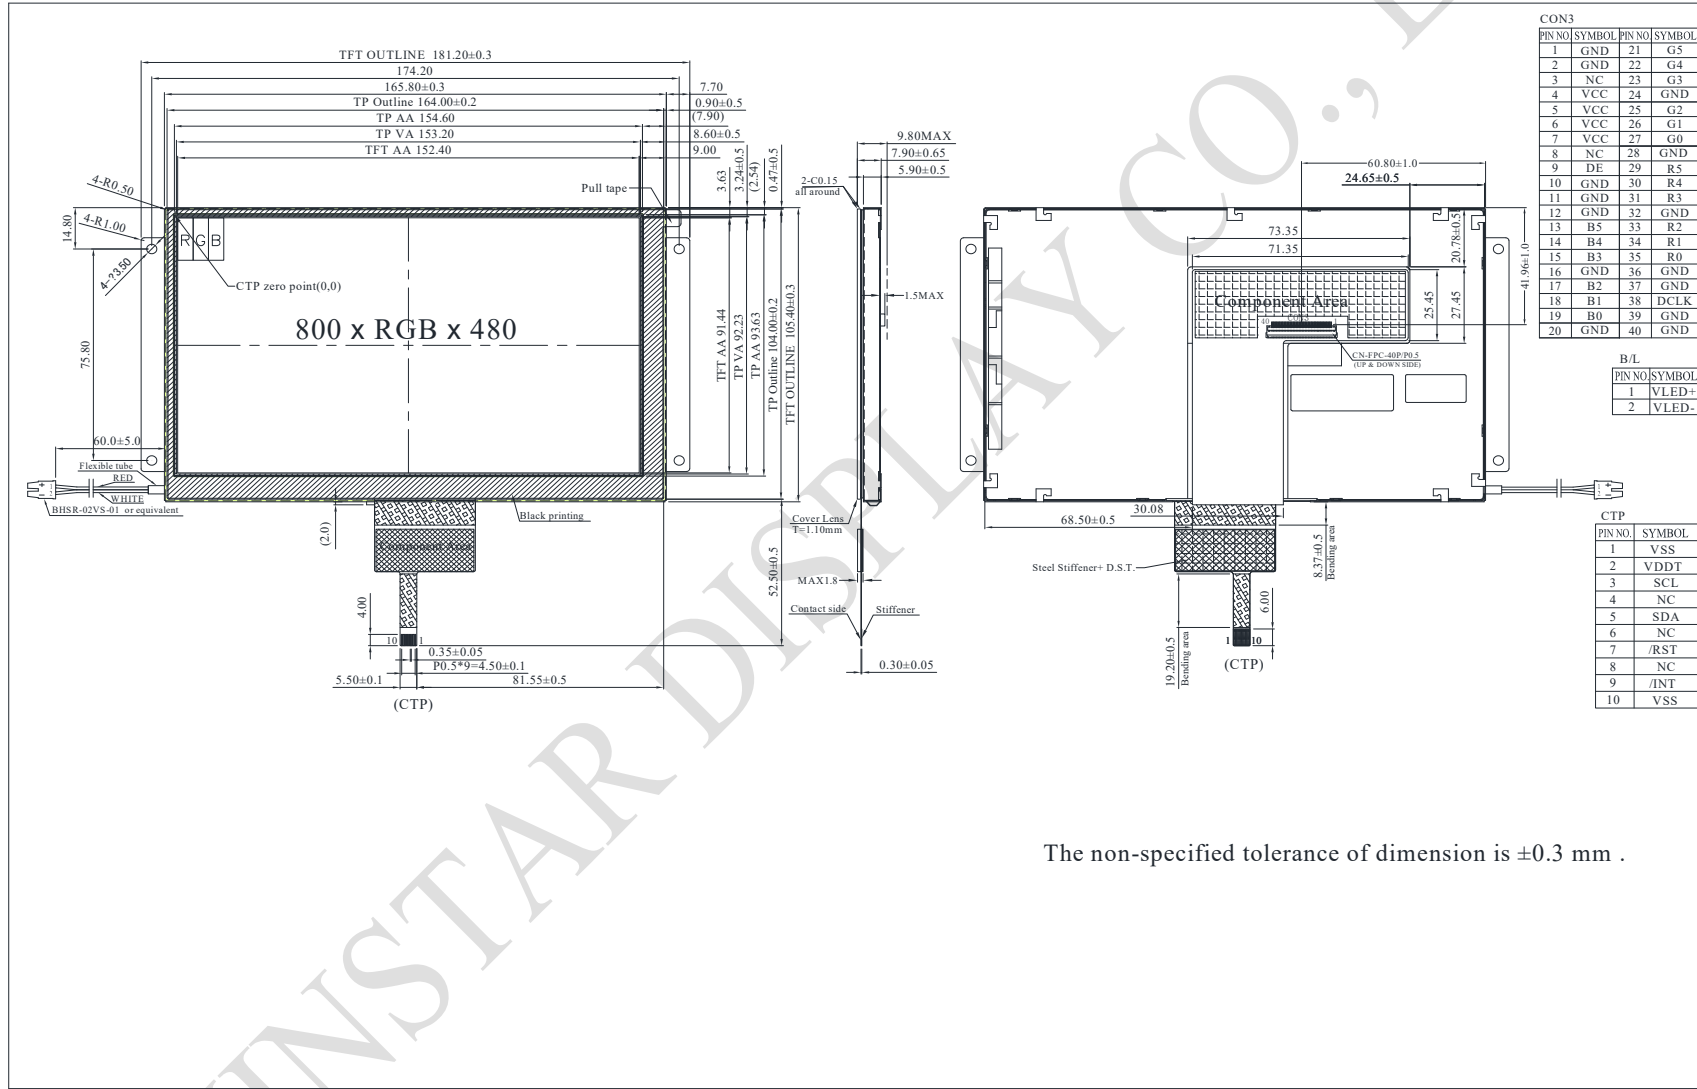

CON3

PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	GND	21	G5
2	GND	22	G4
3	NC	23	G3
4	VCC	24	GND
5	VCC	25	G2
6	VCC	26	G1
7	VCC	27	G0
8	NC	28	GND
9	DE	29	R5
10	GND	30	R4
11	GND	31	R3
12	GND	32	GND
13	B5	33	R2
14	B4	34	R1
15	B3	35	R0
16	GND	36	GND
17	B2	37	GND
18	B1	38	DCLK
19	B0	39	GND
20	GND	40	GND

B/L

PIN NO.	SYMBOL
1	VLED+
2	VLED-

CTP

PIN NO.	SYMBOL
1	VSS
2	VDDT
3	SCL
4	NC
5	SDA
6	NC
7	/RST
8	NC
9	/INT
10	VSS

The non-specified tolerance of dimension is ±0.3 mm .