

# INVASIVE LIQUID FLOW

3013-8446  
Issue 1

## Demo Kit

ILFE00400 (Reusable Base Station)/IFS00400B1B1 (Disposable)  
Thermopile Liquid Flow Sensor (0 mL/hr to 400 mL/hr)

IFS00400B1B1 DISPOSABLE  
SENSOR




ILFE00400 REUSABLE  
BASE STATION

## APPLICATIONS



### **Medical Fluid Management**

Dialysis, urology, and infusion



### **Large Volume Wearable Injectors**

Patch pump, injector, infusion, pump/injector



### **In-Vitro Diagnostics**

Immunoassays, hematology, molecular diagnostics, and microbiology



### **Single Use Bioreactor**

Antibodies, vaccines, stem cells, and gene modified cells

## DESCRIPTION

The liquid flow demo kit is used to demonstrate Honeywell Liquid Flow sensing technology providing a USB interface and desktop application. The sensing system is fully calibrated, and temperature compensated over the specified flow range. The sensor has a linear flow output over the temperature range of 10°C to 40°C [50°F to 104°F] and is calibrated with distilled water.

## DESIGN FEATURES

- High resolution measurements
- Plug and play USB-C interface
- Easy-to-use PC application
- Flexible mounting options

# INVASIVE LIQUID FLOW DEMO KIT

**TABLE 1. SPECIFICATIONS**

| Characteristic                                      | Minimum  | Typical                         | Maximum  | Unit          |
|---|--|---------------------------------|----------|---------------|
| Operating/calibrated temperature range <sup>1</sup> | 10 [50]  | –                               | 40 [104] | °C [°F]       |
| Humidity range (non-condensing)                     | 0  | –                               | 95       | % RH          |
| Liquid flow operating/calibrated range              | 0  | –                               | 400      | mL/hr         |
| Liquid flow full scale span (FSS): full sale        | –  | 400                             | –        | mL/hr         |
| Null accuracy <sup>2,3</sup>                        | –  | 1 %                             | –        | FSS           |
| Total Error Band <sup>4</sup> (forward flow)        | –  | ±1/±5.00 (whichever is greater) | –        | %FSS/%reading |
| Total Error Band <sup>4</sup> (reverse flow)        | –  | –                               | –        | %FSS/%reading |
| Startup time <sup>5</sup>                           | –  | 1                               | –        | second        |
| Storage temperature                                 | 10   | –                               | 55       | °C            |
| Useful life of disposable                           |  | 96 hours                        |          |               |
| Wetted materials <sup>6</sup>                       | Polymer, epoxy, gold, silicon dioxide, silicon nitride |                                 |          |               |
| Calibration liquid <sup>2</sup>                     |  | clean water                     |          |               |

<sup>1</sup>Custom and extended temperature compensated ranges are possible. Contact Honeywell for details.

<sup>2</sup>Customization for other liquids is possible

<sup>3</sup>Null accuracy is the maximum deviation in output from nominal at null flow over the entire calibrated temperature range.

<sup>4</sup>Total Error Band (TEB) is the maximum deviation from the ideal transfer function over the entire compensated temperature and flow range. Includes all errors due to offset, full scale span, flow non-linearity, flow hysteresis, repeatability, thermal effect on offset, thermal effect on span and thermal hysteresis.

<sup>5</sup>Startup time is specific to the evaluation module and is not technology driven.

<sup>6</sup>Designed using bio-compatible materials. The manufacturer is responsible for determining the biocompatibility of the finished product.

## INVASIVE LIQUID FLOW DEMO KIT

Figure 1. Ø 1/2-inch to 1½ inch Pole  
[Ø12,7 mm to Ø38,1 mm Pole]



Figure 2. Standard 1-inch [25,4 mm] T-slotted Frame



Figure 3. Mounted to a Flat Plate using  
a 1/4-20 machine screw



Figure 4. Mounted Using a Vice



### NOTICE MOUNTING

The sensor should be mounted vertically with “UP” direction arrow pointing upward.

# INVASIVE LIQUID FLOW DEMO KIT

Figure 4. Reusable Dimensions (mm, for reference only)


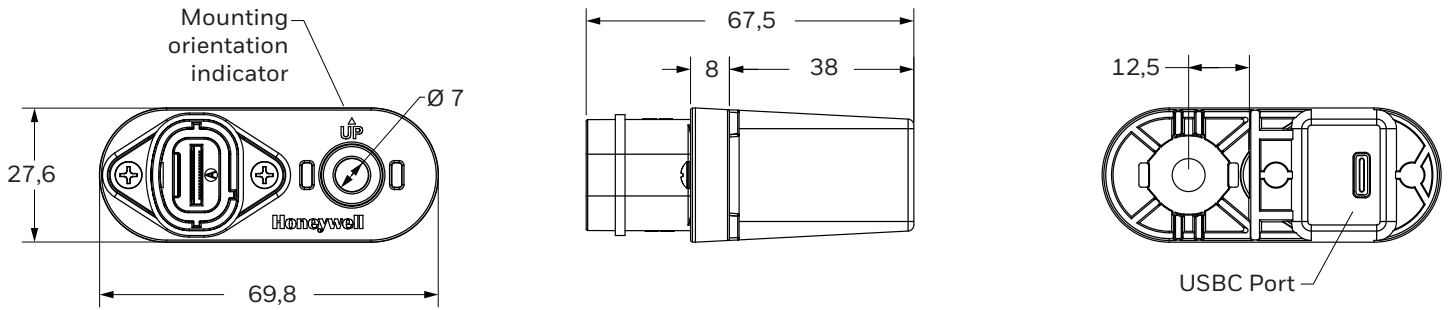


Figure 5. Disposable Dimensions (mm, for reference only)

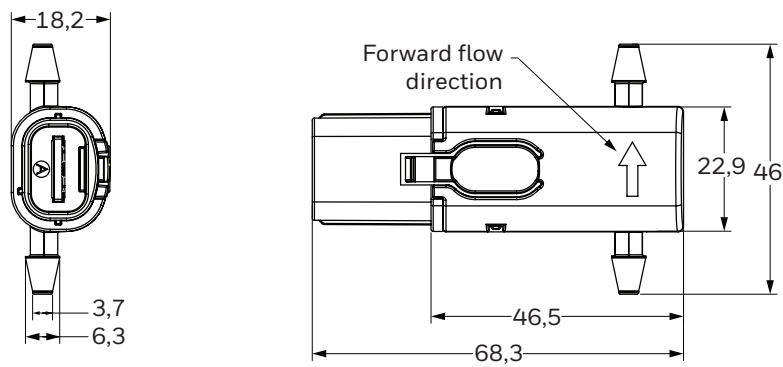

## NOTE

Recommended for use with 3/16-in [4,76 mm] ID silicone tubing, 1/16-in [1,59 mm] wall, 50 SHORE A durometer

Figure 6. Kit Contents



- Reusable base station
- Two (2) disposable liquid flow sensor cartridges
- 3/16-in ID silicon tubing
- USB-C cable
- Reusable zip tie
- T-slot frame mounting screw

### **⚠️ WARNING**

#### **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **⚠️ WARNING**

#### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. The Honeywell standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide information or engineering support for its products through Honeywell personnel, literature and website, it is the buyer's sole responsibility to determine the suitability of the Honeywell product(s) for the buyer's requirements

Specifications may change without notice. The information we supply is believed to be accurate as of this writing. However, Honeywell assumes no responsibility for its use.

#### **Honeywell Sensing Solutions**

830 East Arapaho Road  
Richardson, TX 75081  
[www.honeywell.com](http://www.honeywell.com)