


Product summary

ANN-MB2 antenna

All-band high precision GNSS antenna

Easy-to-use, reliable all-band antenna as part of a u-blox high precision solution

- Robust L1/L2/L5/E6/B3/L active external GNSS antenna
- High performance all-band antenna for the mass-market
- Supports all major GNSS systems for maximum position availability
- Versatile mounting options to meet diverse installation needs
- Enables fast time-to-market

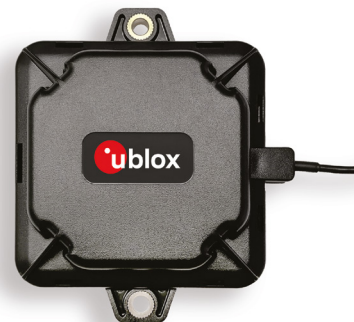

108.5 x 92.9 x 24.7 mm

Product description

The u-blox ANN-MB2 multi-band (L1/L2/L5/E6/B3/L) active GNSS antenna is designed to reduce time-to-market for modern wide-frequency, multi-constellation, high precision GNSS applications. These require centimeter-level accuracy and a reliable RTK positioning fix even in challenging environments. Its robust design, excellent price-to-performance ratio, and flexible mounting options make the ANN-MB2 an ideal choice for mass market applications requiring an all-band high precision GNSS antenna.

The ANN-MB2 is a perfect match to the u-blox all-band X20 high precision platform and the u-blox F9 high precision products that support L1, L2, and L5 bands along with the L-band for RTK corrections (e.g. ZED-F9K, ZED-F9P, LEA-F9T, and ZED-F9T). With ANN-MB2, customers have a reliable, ready-to-use all-band antenna that streamlines evaluation, minimizes design efforts, and speeds up mass adoption.

Patch antenna characteristics¹

	L/L1 band	L5/L2/B3/E6 band
Frequency	1535 - 1602 MHz	1166 - 1285 MHz
Impedance	50 Ω	50 Ω
Peak gain (Zenith)	L: Typ. 5.4 dBic L1: Typ. 5.0 dBic	L5: Typ. 4.5 dBic L2: Typ. 5.0 dBic E6: Typ. 4.2 dBic
Efficiency	L: Typ. 64% L1: Typ. 56%	L5: Typ. 55% L2: Typ. 60% E6: Typ. 50%
Axial ratio (Zenith)	Typ. 0.5-1.3 dB	Typ. 1.9-2.9 dB
Polarization	RHCP	RHCP

¹ Measured on Ø12 cm ground plane.

Amplifier characteristics

	L/L1 band	L5/L2/B3/E6 band
Frequency	1535 - 1602 MHz	1166 - 1285 MHz
Gain without cable (at 5 V)	Typ. 31.0 ±3 dB	Typ. 31.5 ±3 dB
Noise figure (at 5 V)	Typ. 3 dB	Typ. 2.5 dB
Output VSWR	Typ. 2.0	Typ. 2.0
DC voltage	3.0 – 5.0 V	
DC current (at 5 V)	Typ. 15.0 mA	

Mechanical data

Weight	260 g (typ. including cable)
Size	108.5 x 92.9 x 24.7 mm
Cable	5 m RG174 standard
Connector	SMA
Mounting	Magnetic base, fixed installation option (screw)
Housing color	Black

Certifications and approvals

CE approval	Based on Radio Equipment Directive (RED) 2014/53/EU and the Restriction of the use of certain Hazardous Substances Directive (RoHS) 2011/65/EU and 2015/863/EU
-------------	--

Environmental data

Operating temp.	-40 °C to +85 °C
Storage temp.	-40° C to +85 °C
Water proof	IP 67

Product variants

ANN-MB2-00	Multi-band (L1/L2/L5/E6/B3/L) active GNSS antenna, high precision, with 5-meter cable and SMA connector
------------	---

Legal Notice:

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents and latest product statuses, visit www.u-blox.com.

Copyright © 2024, u-blox AG

Further information

For contact information, see www.u-blox.com/contact-u-blox.